

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(43) International Publication Date
8 July 2004 (08.07.2004)

PCT

(10) International Publication Number
WO 2004/056174 A1(51) International Patent Classification⁷: **A01J 5/08**
// C08J 5/00, C08L 21/00(21) International Application Number:
PCT/SE2003/002024(22) International Filing Date:
19 December 2003 (19.12.2003)

(25) Filing Language: English

(26) Publication Language: English


(30) Priority Data:
0203871-9 20 December 2002 (20.12.2002) SE(71) Applicant (for all designated States except US):
DELAVAL HOLDING AB [SE/SE]; P O Box 39,
S-147 21 Tumba (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GISSLEGÅRD,**Mikael [SE/SE]; Kassmyravägen 20, S-147 33 Tumba (SE). **ÄLVEBY, Nils** [SE/SE]; Anders Reimers väg 13, S-117 50 Stockholm (SE). **BELLANDER, Martin** [SE/SE]; Tvärvägen 16, S-134 31 Gustavsberg (SE). **PETTERSON, Torbjörn** [SE/SE]; Rosenhed, S-646 32 Gnesta (SE). **ODEBERG, Johan** [SE/SE]; Frejgatan 14, S-113 49 Stockholm (SE).(74) Agent: **DR LUDWIG BRANN PATENTBYRÅ AB**; P O Box 1344, S-751 43 Uppsala (SE).(81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, EG, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT (utility model), PT, RO, RU, SC, SD, SE, SG, SK (utility model),

[Continued on next page]

(54) Title: MILKING DEVICES

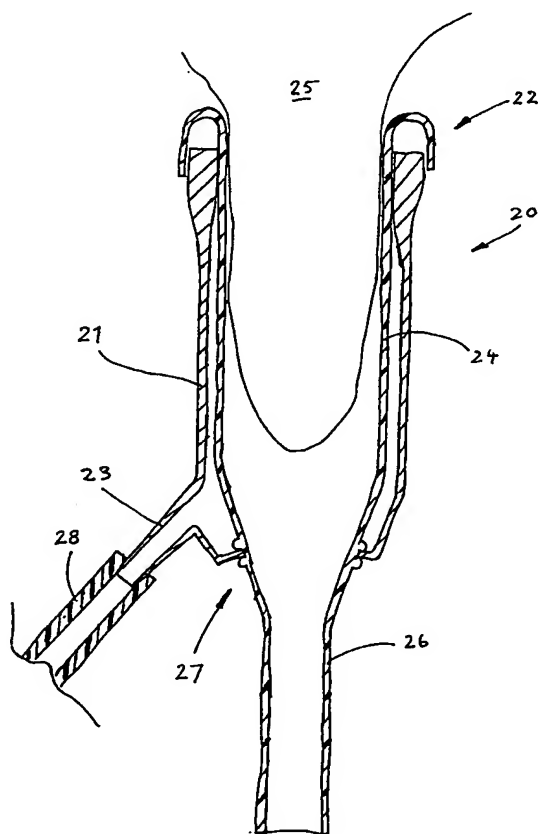

(57) Abstract: The present invention relates to devices and components for milking apparatus, in particular to milk extracting devices. Especially it relates to components of such devices such as liners (20). The novel devices comprise a material, selected from the group consisting of thermo-plastic elastomers, as defined in ISO 18064, plasticized PVC, Vinyl TPE, said material exhibiting the following properties: a hardness between 25 shore A and 50 shore D; a Young's modulus between 0.1 MPa and 50 MPa; a tensile strength above 0.5 MPa; and a minimum elongation of 50% without breakage.



SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.

SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(84) **Designated States (regional):** ARIPO patent (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.